


# Zonnedakpan 24W Plat



HDSF24M-6

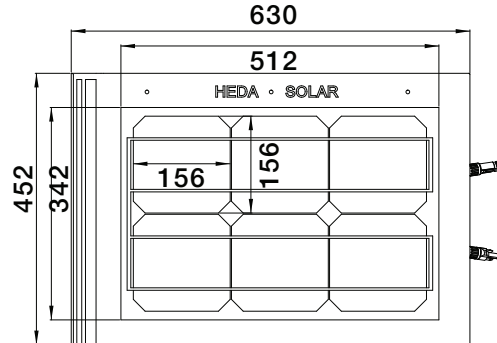

## Elektronische karakteristieken

All specified Parameters at STC 25°C.

Ambient, 1000W/m<sup>2</sup> irradiance and AM1.5.

|                               |       |
|-------------------------------|-------|
| Max-Power Pm (W)              | 24    |
| Power Tolerance (W)           | ±3%   |
| Open-Circuit Voltage Voc (V)  | 3.77  |
| Short-Circuit Current Isc (A) | 8.95  |
| Max-Power Voltage Vm (v)      | 2.93  |
| Max-Power Current Im (A)      | 8.20  |
| Cell Efficiency (%)           | 17.75 |


## Operating Temperature

High heat insulation and antflaming function -40- +85°C

## Mechanische karakteristieken

|                                       |                                                   |
|---------------------------------------|---------------------------------------------------|
| Cable type, area and length           | 2.5mm <sup>2</sup> , 600mm                        |
| Number, type and arrangement of cells | 6                                                 |
| Cell size (mm)                        | 156x156                                           |
| Dimension (mm)                        | 630x452x30                                        |
| Weight (kgs)                          | 5.20                                              |
| Frame material                        | Ceramic Compound                                  |
| Glass, type and thickness             | High Transmission, Low Iron, Tempered Glass 3.2mm |
| Compression strength                  | >2400Pa                                           |
| Water Permeability                    | <0.5%                                             |

## I-V curve

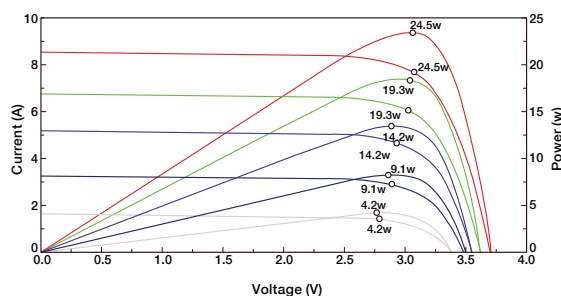

## Bijpassende dakpan



HD24M


## Verpakking

|           | Doos          | 1 pallet        | 2 pallets       | 20' container |
|-----------|---------------|-----------------|-----------------|---------------|
| size:(mm) | 660*135*460mm | 1400*700*1050mm | 1400*700*2100mm | 24pallets     |
| QTY       | 4pcs          | 80pcs           | 160pcs          | 1920pcs       |

## Garantie

10 Years product workmanship warranty  
 12 Years warranty, 90% power output  
 25 Years warranty, 80% power output  
 Tile life span 50 years

## Zonnedakpan 24W



HD20M

## Dakrand



HDT-1



HDT-2



HD20R-24R-1



HD20R-24R-2




HD20R-24R-3



HD20R-24R-4



## Installatie

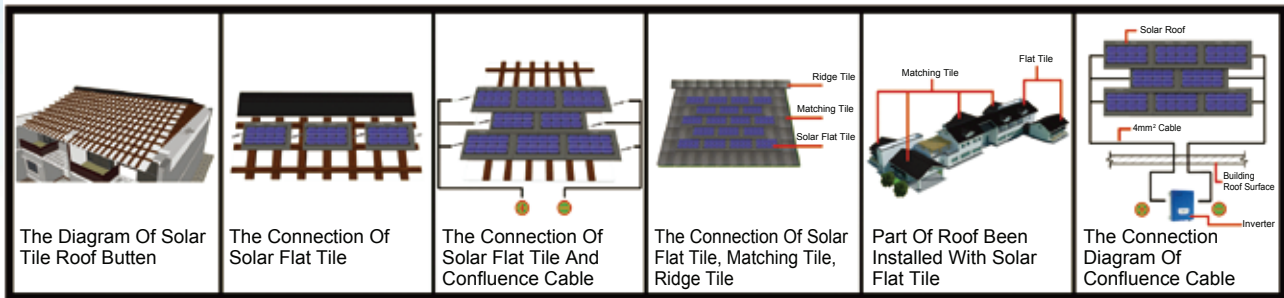





# Algemene functies

## ■ Heat Insulation



## ■ Light-Protection & Water-Proof

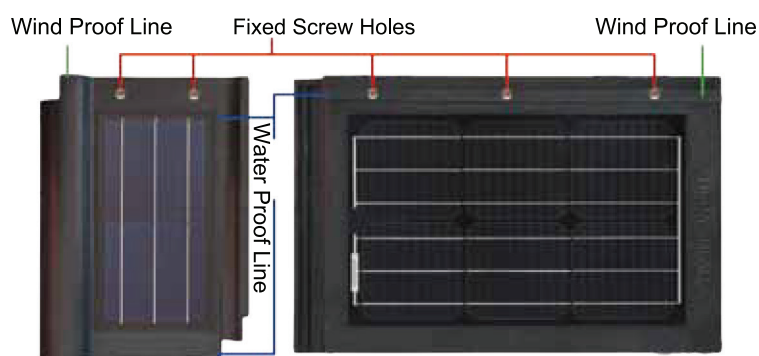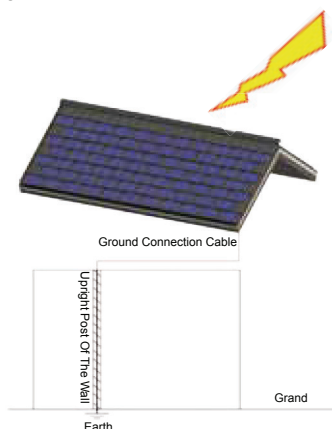

## ■ High Strength

