


Zonnedakpan industrieel 50w



HDS50T-12

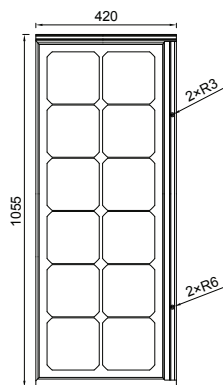

- Grain, warehouse, to build zero-energy eco barn preservation
- Residential housing
- Factory
- New rural construction

Elektronische karakteristieken

All specified Parameters at STC 25°C.

Ambient, 1000W/m² irradiance and AM1.5.

Max-Power Pm (W)	50
Power Tolerance (W)	±3%
Open-Circuit Voltage Voc (V)	7.68
Short-Circuit Current Isc (A)	8.85
Max-Power Voltage Vm (v)	6.12
Max-Power Current Im (A)	8.24
Cell Efficiency (%)	18.50


Operating Temperature

High heat insulation and antflaming function -40- +85°C

Mechanische karakteristieken

Cable type, area and length	4mm ² , 700mm
Number, type and arrangement of cells	12
Cell size (mm)	156x156
Dimension (mm)	1055x420x25.7
Weight (kgs)	6.00
Frame material	Aluminium
Glass, type and thickness	High Transmission, Low Iron, Tempered Glass 3.2mm
Compression strength	>2400Pa
Water Permeability	<0.5%

I-V curve

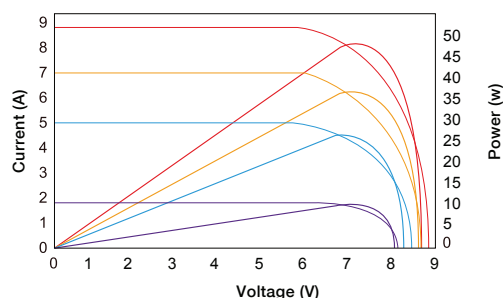

Bijpassende dakpan



HD50T

Verpakking

	Doos	1 pallet	2 pallets	20' container
size:(mm)		1080*1120*450mm		40pallets
QTY		18pcs		720pcs

Garantie



- 10 Years product workmanship warranty
- 12 Years warranty, 90% power output
- 25 Years warranty, 80% power output

Algemene functies

■ Heat Insulation



■ Light-Protection & Water-Proof

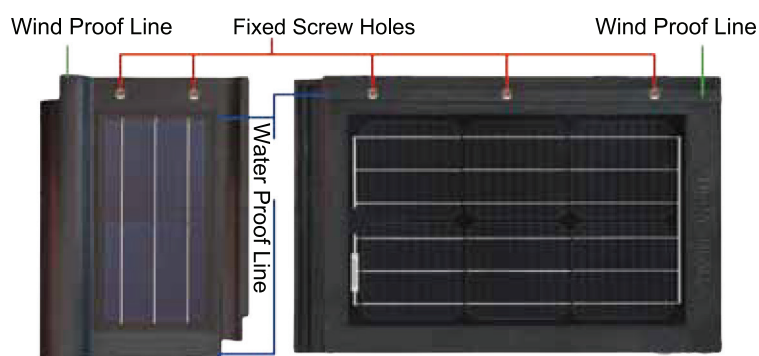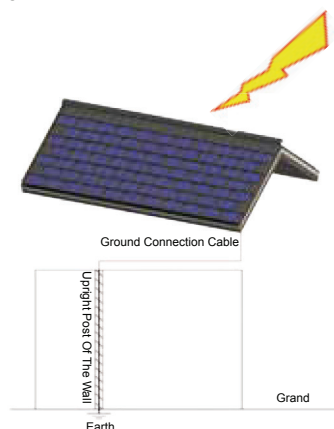

■ High Strength

